


# Hammer Grip Application Instructions


(Make sure your hammer handle is both clean and dry before proceeding).

**Step One:** Begin by cutting a bias (angle) in the top of the leading edge of your grip wrap.

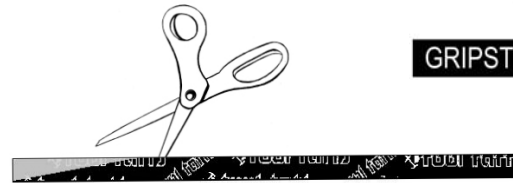

Step One

**Step Two:** Start wrapping your hammer handle holding the biased cut edge perpendicular to the hammer (this will enable your wrap to spiral up the handle overlapping slightly as you proceed).

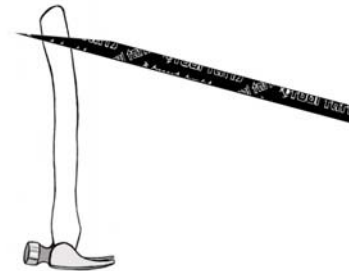


Step Two and Step Three

(To ensure the best grip, pull the grip wrap tight during the entire wrapping).

**Step Three:** Wrap the length of your hammer handle. Pull tight as you apply the grip, overlapping the edge approx. 1/4" as you spiral the grip wrap material


**Step Four:** Cut a reverse bias on the end of your grip wrap.

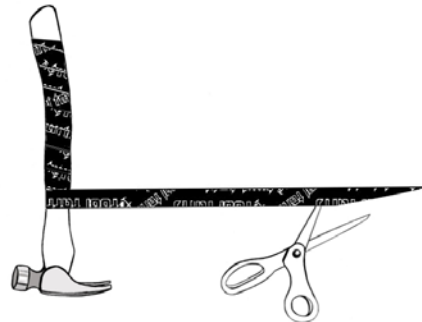

Step Four

**Step Five:** Apply finish tape to both the beginning and end of your grip wrap.

(You will most likely have extra grip material to remove for a proper grip).

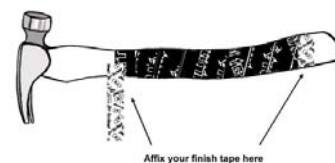

Step Five



Be sure to use your tooltatts ® tin to hold cordless drill tips, screws, and other small items at work!